
ROTADAIRON®

STONE BURIER FOR MICRO-TRACTOR





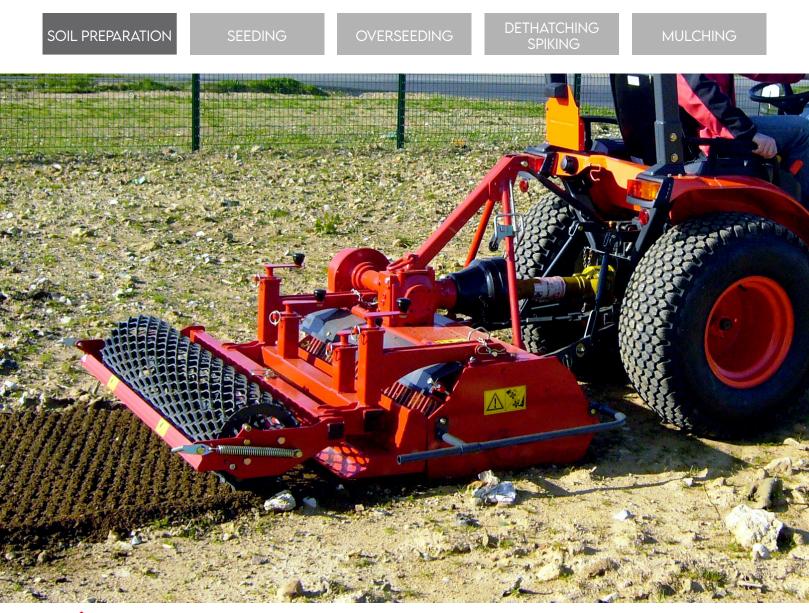

STONE BURIER FOR MICRO-TRACTOR **RD130**


Functions of the stone burier RD 130

This soil preparer and stone burier is designed for micro-tractors. It allows the building or renovation of green spaces by preparing the seed bed before seeding. The machine is multi-purpose, it allows tilling, burying (stones, rubbish, herbs, etc.), levelling, mixing and rolling the surface. The use is done live or on a ground previously decompacted in depth and cleared of large stones.

Quality of service 🗱

A large stock of spare parts is permanently maintained at our factory. Our partners have online tools and quick access to manufacturer information. Maintain the quality and performance of your Rotadairon® by using only original parts.


Machine	RD 130
Working width	1338 mm (52''3/4)
Total width	1840 mm (72" 1/2)
Weight with mesh metal roller	450 Kg (992 lb)
Tractor : required power	25 - 45 CV
Tractor : max track width	1,62 meters (63" 3/4)
Working depth (max)	140 mm (5" 1/2)
Rotor outer diameter	400 mm (15" _{3/4})
Depth adjustment	Support on rear roller adjustable by screw jacks
Number of blades	42
Grid finger spacing	20 mm (4/5'')
3 point hitch	Categories 1 & 2
PTO speed	540 tr/min
Tractor forward speed	0.8 to 1,5 Km/h (0.5 to 0.9 mph)
Transmission	Angle gearbox + Oil bath chain
Security	Oil bath torque limiter at the end of the rotor
Transport dimension w x L x H	1760 mm x 1570 mm x 995 mm (69" 1/4 x 61" 3/4 x 39" 1/4)
Weight with cast iron notched disc roller	525 Kg (1157.4 lb)
Options	 Rear mesh roller side adjustment device by cylinder Cast-iron notched discs roller frame Stainless Steel Splice Dispenser Seeder : SMC 130 Gravity Grass Seeder : SG 130















ROTADAIRON Départementale 92 - Les Hunaudières 72230 Mulsanne - France Mail : contacts@rotadairon.fr Phone number : (33) 2 43 422 422

CE

www.rotadairon.fr

Copyright ROTADAIRON, 12/2021, Noncontractual photographs, «Printed with care please do not litter - Recycle» - R.C.S. Le Mans B 319 428 447 - APE 2830 Z

- **1** Oversized rotor
- 2 Anti-pad blades (Rotadairon[®] patent)
- **3** Selection grid fingers
- 4 Oil bath torque limiter at rotor end
- 5 Soil preparation principle
- 6 Working depth adjustment
- **7** Grader blade
- 8 Option : Rear mesh roller side adjustment device by cylinder
- 9 Option : Cast-iron notched discs roller frame
- 10 Option : Stainless Steel Splice Dispenser Seeder